



U74HC14B

CMOS IC


HIGH-SPEED CMOS LOGIC HEX INVERTING SCHMITT TRIGGER

DESCRIPTION

The UTC **U74HC14B** each contain six inverting Schmitt triggers in one package. Each of them perform the Boolean function $Y = \overline{A}$

FEATURES

- * Wide range operation: 2V ~ 6V
- * Low power consumption
- * Schmitt Trigger Inputs

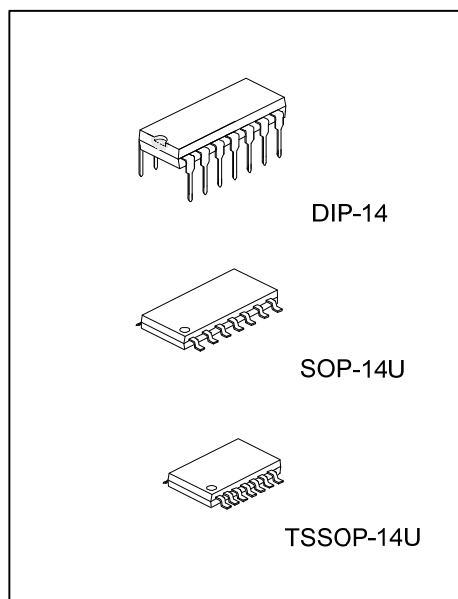

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HC14BL-D14-T	U74HC14BG-D14-T	DIP-14	Tube
U74HC14BL-UEA-R	U74HC14BG-UEA-R	SOP-14U	Tape Reel
U74HC14BL-UEB-R	U74HC14BG-UEB-R	TSSOP-14U	Tape Reel

U74HC14BG-D14-T


- (1) Packing Type
- (2) Package Type
- (3) Green Package

- (1) T: Tube, R: Tape Reel
- (2) D14: DIP-14, UEA: SOP-14U, UEB: TSSOP-14U
- (3) G: Halogen Free and Lead Free, L: Lead Free


MARKING

DIP-14	SOP-14U / TSSOP-14U
14 13 12 11 10 9 8 UTC □□□□ U74HC14B □ □□ 1 2 3 4 5 6 7 → Date Code → L: Lead Free → G: Halogen Free → Lot Code	14 13 12 11 10 9 8 UTC □□□□ U74HC14B □ □□ 1 2 3 4 5 6 7 → Date Code → L: Lead Free → G: Halogen Free → Lot Code

PIN CONFIGURATION

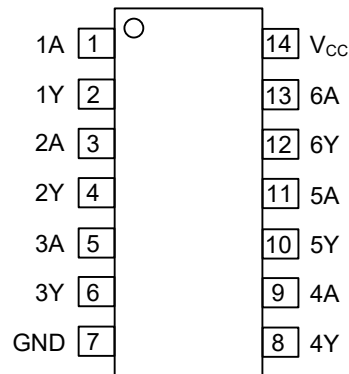

FUNCTIONAL DIAGRAM



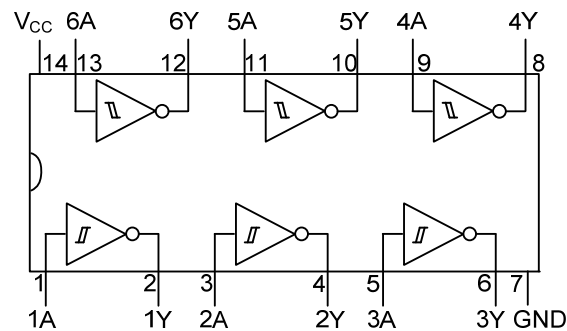


TRUTH TABLE

INPUT(A)	OUTPUT(Y)
L	H
H	L

Note: H=High level; L=Low Level

■ LOGIC DIAGRAM

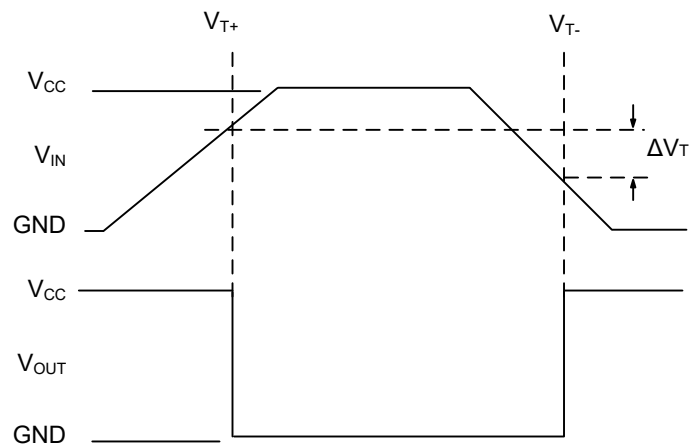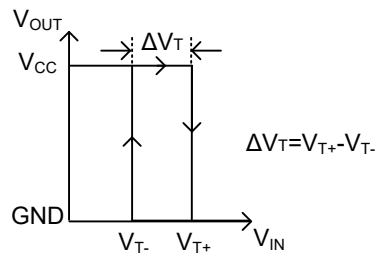

Hysteresis Definition, Characteristic, And Test Setup

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage	V_{CC}		-0.5 ~ 7	V
Input Clamp Current	I_{IK}	$V_{IN} < 0$ or $V_{IN} > V_{CC}$	± 20	mA
Output Clamp Current	I_{OK}	$V_{OUT} < 0$ or $V_{OUT} > V_{CC}$	± 20	mA
Continuous Output Current	I_{OUT}	$V_{OUT} = 0$ to V_{CC}	± 25	mA
V_{CC} or Ground Current	I_{CC}		± 50	mA
Storage Temperature	T_{STG}		-65 ~ +150	°C
Electrostatic Discharge	$V_{(ESD)}$	Human-Body Model (HBM) Per JESD22-A114/115	2000	V

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2		6	V
Input or Output Voltage	V_{IN}, V_{OUT}		0		V_{CC}	V
Operating Temperature	T_A		-40		+125	°C

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS		UNIT
Junction to Ambient	DIP-14	θ_{JA}	100		°C/W
	SOP-14U		125		°C/W
	TSSOP-14U		150		°C/W

■ ELECTRICAL CHARACTERISTICS (Unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A = 25^\circ\text{C}$			$T_A = -40^\circ\text{C} \sim +125^\circ\text{C}$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Threshold Voltage	V_{T+}	$V_{CC} = 2\text{V}$	0.7	1.1	1.5	0.7		1.5	V
		$V_{CC} = 4.5\text{V}$	1.55	2.3	3.15	1.55		3.15	V
		$V_{CC} = 6\text{V}$	2.1	3	4.2	2.1		4.2	V
	V_{T-}	$V_{CC} = 2\text{V}$	0.3	0.6	1.0	0.3		1.0	V
		$V_{CC} = 4.5\text{V}$	0.9	1.6	2.45	0.9		2.45	V
		$V_{CC} = 6\text{V}$	1.2	2	3.2	1.2		3.2	V
	ΔV_T	$V_{CC} = 2\text{V}$	0.2	0.5	1.2	0.2		1.2	V
		$V_{CC} = 4.5\text{V}$	0.4	0.7	2.1	0.4		2.1	V
		$V_{CC} = 6\text{V}$	0.5	1.0	2.5	0.5		2.5	V
High-Level Output Voltage	V_{OH}	$V_{IN} = V_{T+}$ or V_{T-} , $V_{CC} = 2\text{V}$, $I_{OH} = -20\mu\text{A}$	1.9			1.9			V
		$V_{IN} = V_{T+}$ or V_{T-} , $V_{CC} = 4.5\text{V}$, $I_{OH} = -20\mu\text{A}$	4.4			4.4			V
		$V_{IN} = V_{T+}$ or V_{T-} , $V_{CC} = 6\text{V}$, $I_{OH} = -20\mu\text{A}$	5.9			5.9			V
		$V_{IN} = V_{T+}$ or V_{T-} , $V_{CC} = 4.5\text{V}$, $I_{OH} = -4\text{mA}$	3.98			3.7			V
		$V_{IN} = V_{T+}$ or V_{T-} , $V_{CC} = 6\text{V}$, $I_{OH} = -5.2\text{mA}$	5.48			5.2			V

■ ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER	SYMBOL	TEST CONDITIONS	T _A =25°C			T _A =-40°C~+125°C			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Low-Level Output Voltage	V _{OL}	V _{IN} =V _{T+} or V _{T-} , V _{CC} =2V, I _{OL} =20μA			0.1			0.1	V
		V _{IN} =V _{T+} or V _{T-} , V _{CC} =4.5V, I _{OL} =20μA			0.1			0.1	V
		V _{IN} =V _{T+} or V _{T-} , V _{CC} =6V, I _{OL} =20μA			0.1			0.1	V
		V _{IN} =V _{T+} or V _{T-} , V _{CC} =4.5V, I _{OL} =4mA			0.26			0.4	V
		V _{IN} =V _{T+} or V _{T-} , V _{CC} =6V, I _{OL} =5.2mA			0.26			0.4	V
Input Leakage Current	I _{IN}	V _{IN} =V _{CC} and GND, V _{CC} =6V			±0.1			±1	μA
Quiescent Supply Current	I _Q	V _{IN} =V _{CC} or GND, V _{CC} =6V, I _{OUT} =0			2			40	μA


■ SWITCHING CHARACTERISTICS (C_L=50pF, Input t_R, t_F=6ns, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	T _A =25°C			T _A =-40°C~+125°C			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay, Input (A) to Output (Y)	t _{PLH} , t _{PHL}	V _{CC} =2V		55	125			190	ns
		V _{CC} =4.5V		12	25			38	ns
		V _{CC} =6V		11	21			32	ns
Output Transition Time	t _{TLH} , t _{THL}	V _{CC} =2V		38	75			110	ns
		V _{CC} =4.5V		11	21			28	ns
		V _{CC} =6V		10	19			25	ns

■ OPERATING CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Capacitance	C _{IN}				10	pF
Power Dissipation Capacitance	C _{PD}	No load		20		pF

■ TEST CIRCUIT AND WAVEFORMS

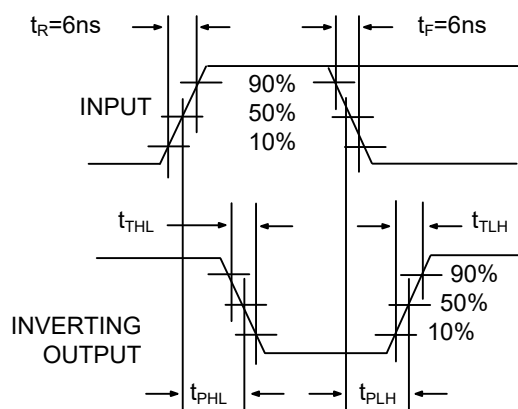

Transition Times And Propagation
Delay Times, Combination Logic

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.